

DiskStation

DS1618+



Synology DiskStation DS1618+ is a versatile, compact, yet powerful 6-bay NAS equipped with quad-core processor, designed for small- and medium-sized businesses. It comes with advanced computing applications to meet businesses' demand and supercharges your storage with the optional M.2 SSD adapter card for dual SSD cache drives. DS1618+ is ideal to serve as a centralized file server for simplifying data management and protecting critical assets. Synology DS1618+ is backed with Synology's 3-year limited warranty.

High-performance Scalable Storage Server

Synology DS1618+ is a 6-bay network attached storage solution with great performance and scalability. DS1618+ supports up to 16 drives with two Synology **DX517³** expansion units, allowing you to start small and easily scale up on demand. In addition to **10GbE add-on card**, which can upgrade the network capacity of DS1618+, the PCIe slot also supports the optional **SATA M.2 SSD adapter card** to function as SSD cache for greatly enhanced storage performance without using the 3.5" drive bays.

DS1618+ is equipped with a **quad-core** processor and **4GB DDR4 memory (expandable up to 32GB)**. With Link Aggregation enabled, DS1618+ delivers outstanding sequential throughput performance at over **1,550 MB/s reading** and **580 MB/s writing¹**.

Btrfs: Next Generation Storage Efficiency

DS1618+ introduces the **Btrfs file system**, bringing the most advanced storage technologies to meet the management needs of modern businesses:

- **Built-in data integrity check** detects data and file system corruption with data and meta-data checksums and improves the overall stability.
- **Flexible Shared Folder/User Quota System** provides comprehensive quota control over all user accounts and shared folders.
- **Advanced snapshot technology** with customizable backup schedule allows up to **1,024 copies** of shared folder backups in a minimum **5-minute interval** without occupying huge storage capacity and system resources.
- **File or folder level data restoration** brings huge conveniences and saves time for users who wish to restore only a specific file or folder.
- **File self-healing:** Btrfs file system can auto-detect corrupted files with mirrored metadata, and recover broken data using the supported RAID volumes, which include RAID1, 5, 6, and 10.

Highlights

- Powerful and scalable 6-bay NAS optimized for data-intensive work environment
- Quad-core, 2.1 GHz CPU with AES-NI support and 4GB DDR4 memory, expandable up to 32GB
- Outstanding performance at over 1,550 MB/s reading and 580 MB/s writing¹
- Boost IOPS system performance with M.2 SSD cache by using optional M2D17 adapter card²
- PCIe 3.0 slot for optional 10GbE add-on card
- Four built-in 1GbE (RJ-45) ports with failover and Link Aggregation support
- Advanced Btrfs file system offering 65,000 system-wide snapshots and 1,024 snapshots per shared folder
- Scale up to 16 drives with two DX517³ expansion units

Cross-platform File Sharing

DSM, the operating system running on NAS, provides fast and secure ways to share your critical digital assets. **Synology Drive** unifies multiple file portals on Synology NAS and greatly simplifies data management. You can share files to anyone, and customize access permissions for optimal security. **Synology Drive** makes it easy to share files across multiple platforms — whether it's Windows®, Mac®, and Linux® computers or mobile devices.



Next-Generation File System

A modern file system designed to address obstacles often encountered in enterprise storage systems. Safeguarding data integrity through metadata mirroring, self-healing and snapshot replication.

Centralized Backup Storage

DS1618+ can serve as a centralized backup destination, providing large storage capacity with affordable cost of ownership. Large amount of data scattered on employees' workstations can be easily backed up and synced to a centralized target on DS1618+. **Cloud Sync** keeps your Dropbox, Google Drive, Microsoft OneDrive, Baidu, and Box storage in sync with DS1618+.

With block-level incremental backup and cross-version deduplication, Synology **Hyper Backup** provides multi-version backup with optimized storage utilization and allows for backing up to multiple destinations—local shared folders, external hard drives, network shared folders, rsync servers, and public cloud services.

Effortless Virtualization Environment

Synology's **Virtual Machine Manager** adds unlimited capabilities to your NAS. Set up and run various virtual machines, including **Windows**, **Linux**, and **Virtual DSM** so that you can test new software versions in a sandbox environment, isolate your customers' machines, and increase the flexibility of your DS1618+ with reduced hardware deployment and maintenance costs.

Synology iSCSI storage fully supports most virtualization solutions to enhance work efficiency with a simple management interface. **VMware vSphere™ 6.5** and **VAAI** integration helps offload storage operations and optimizes computation efficiency. **Windows Offloaded Data Transfer (ODX)** speeds up data transfer and migration rates, while **OpenStack Cinder** support turns your Synology NAS into a block-based storage component.



Virtual Machine Manager

Virtual Machine Manager implements various virtualization solutions, allowing you to manage multiple virtual machines on your DS1618+, including Windows, Linux, and Virtual DSM.

Reliability, Availability & Disaster Recovery



System reliability is of paramount importance to businesses which depend upon their commercial servers every day. DS1618+ responds to these concerns with wide-ranging availability and redundancy features:

- **Synology High Availability** Manager ensures seamless transitioning between clustered servers with minimal impact to applications, preventing unexpected interruptions and costly downtime.
- **Redundant power supplies, system fans** and **network ports** with failover support ensure maximum continuous service uptime.
- High reliability system design including **fan-less CPU heat-sink** and passive cooling technology, preventing single points of failure.
- **Optional 5-year warranty⁴** is available in select regions.

Hardware Overview

Front

Rear

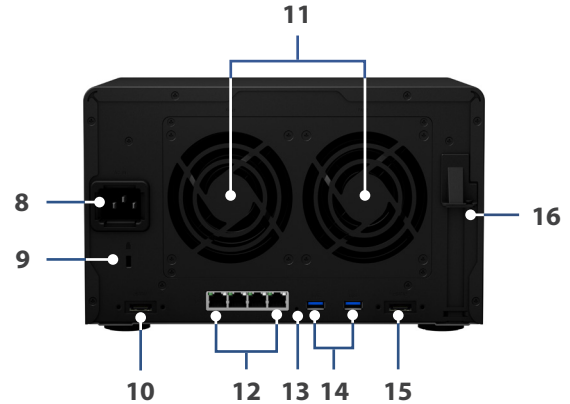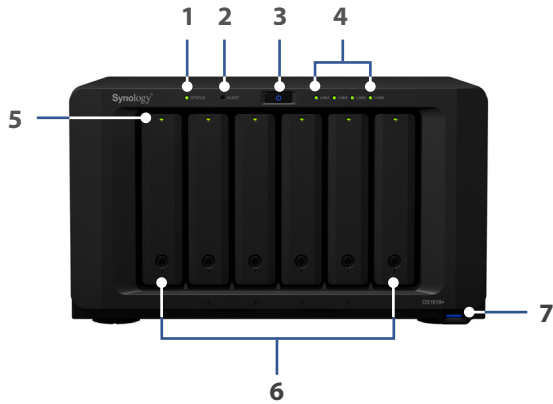

| | | | | | | | |
|----|--------------------------|----|-----------------|----|--------------|----|---------------------|
| 1 | Status indicator | 2 | Alert indicator | 3 | Power button | 4 | LAN indicator |
| 5 | Drive status indicator | 6 | Drive tray | 7 | USB 3.0 port | 8 | Power port |
| 9 | Kensington Security Slot | 10 | eSATA port | 11 | Fan | 12 | 1GbE RJ-45 port |
| 13 | RESET button | 14 | USB 3.0 port | 15 | eSATA port | 16 | PCIe expansion slot |

Technical Specifications

Hardware

| | |
|----------------------------|---|
| CPU | Intel Atom C3538 quad-core 2.1GHz |
| Hardware encryption engine | Yes (AES-NI) |
| Memory | 4 GB DDR4-2133 Non-ECC SO-DIMM (expandable up to 32 GB with 16 GB ECC SO-DIMM x 2) |
| Compatible drive type | <ul style="list-style-type: none"> • 6 x 3.5" or 2.5" SATA SSD/HDD (drives not included) • 2 x M.2 2280/2260/2242 SSD³ (drives not included) |
| External port | <ul style="list-style-type: none"> • 3 x USB 3.0 port • 2 x Expansion port |
| Size (HxWxD) | <ul style="list-style-type: none"> • 166 x 282 x 236 mm • 166 x 282 x 243 mm (with server ears) |
| Weight | 5.05 kg |
| LAN | 4 x 1GbE (RJ-45) |
| Wake on LAN/WAN | Yes |
| PCIe 3.0 slot | <ul style="list-style-type: none"> • x8 slot x 1 (4-lane) • 10GbE network interface cards support • M.2 SSD adapter card support |
| Scheduled power on/off | Yes |
| System fan | 2 (92 x 92 x 32 mm) |
| AC input power voltage | 100V to 240V AC |
| Power frequency | 50/60Hz, single phase |
| Operating temperature | 0°C to 40°C (32°F to 104°F) |
| Storage temperature | -20°C to 60°C (-5°F to 140°F) |
| Relative humidity | 5% to 95% RH |
| Maximum operating altitude | 3,048 m (10,400 ft) |

General DSM Specification

| | |
|-------------------------|---|
| Networking protocol | SMB, AFP, NFS, FTP, WebDAV, CalDAV, iSCSI, Telnet, SSH, SNMP, VPN (PPTP, OpenVPN™, L2TP) |
| File system | <ul style="list-style-type: none">Internal: Btrfs, ext4External: Btrfs, ext4, ext3, FAT, NTFS, HFS+, exFAT⁵ |
| Supported RAID type | Synology Hybrid RAID (SHR), Basic, JBOD, RAID 0, RAID 1, RAID 5, RAID 6, RAID 10 |
| Storage management | <ul style="list-style-type: none">Maximum single volume size: 108 TBMaximum of system snapshots: 65,536⁶Maximum internal volumes: 512Maximum iSCSI targets: 32Maximum iSCSI LUNs: 256iSCSI LUN clone/snapshot support |
| SSD cache | <ul style="list-style-type: none">Read-write cache supportM.2 SSD support |
| File sharing capability | <ul style="list-style-type: none">Maximum local user accounts: 2,048Maximum local groups: 256Maximum shared folders: 512Maximum concurrent SMB/NFS/AFP/FTP connections: 1,000 |
| Privilege | Windows Access Control List (ACL), application privilege |
| Directory service | Windows® AD integration: Domain users login via SMB/NFS/AFP/FTP/File Station, LDAP integration |
| Virtualization | VMware vSphere® 6.5, Microsoft Hyper-V®, Citrix®, OpenStack® |
| Security | Firewall, encrypted shared folder, SMB encryption, FTP over SSL/TLS, SFTP, rsync over SSH, login auto block, Let's Encrypt support, HTTPS (Customizable cipher suite) |
| Supported client | Windows 7 and 10, Mac OS X® 10.11 onwards |
| Supported browser | Chrome®, Firefox®, Internet Explorer® 10 onwards, Safari® 10 onwards; Safari (iOS 10 onwards), Chrome (Android™ 6.0 onwards) |
| Interface Language | English, Deutsch, Français, Italiano, Español, Dansk, Norsk, Svensk, Nederlands, Русский, Polski, Magyar, Português do Brasil, Português Europeu, Türkçe, Český, 日本語, 한국어, 繁體中文, 简体中文 |

Packages and Applications

| | |
|---------------------------|--|
| File Station | Virtual drive, remote folder, Windows ACL editor, compressing/extracting archived files, bandwidth control for specific users or groups, creating sharing links, transfer logs |
| FTP Server | Bandwidth control for TCP connections, custom FTP passive port range, anonymous FTP, FTP SSL/TLS and SFTP protocol, boot over the network with TFTP and PXE support, transfer logs |
| Universal Search | Offer global search into applications and files |
| Hyper Backup | Support local backup, network backup, and backup data to public clouds |
| Active Backup for Server | Centralize data backup for Windows and Linux servers without client installation |
| Backup tools | DSM configuration backup, macOS Time Machine support, Cloud Station Backup Shared folder sync - maximum tasks: 8 |
| Cloud Station Suite | Sync data between multiple platforms by installing the client utilities on Windows, Mac, Linux, Android and iOS devices, while retaining up to 32 historical versions of files Maximum concurrent file transfers: 1,000 |
| Drive | <ul style="list-style-type: none">Maximum Number of Synced Files: 1,000,000 / single file reaction time 437 msMaximum Number of Concurrent Connections for PC Clients: 550 |
| Cloud Sync | One or two-way synchronization with public cloud storage providers including Amazon Drive, Amazon S3-compatible storage, Baidu cloud, Box, Dropbox, Google Cloud Storage, Google Drive, hubiC, MegaDisk, Microsoft OneDrive, OpenStack Swift-compatible storage, WebDAV servers, Yandex Disk |
| Surveillance Station | Maximum IP cameras: 40 (total of 1,200 FPS at 720p, H.264) (includes two free camera licenses; additional cameras require the purchasing of additional licenses) |
| Virtual Machine Manager | Deploy and run various virtual machines on Synology NAS, including Windows, Linux, or Virtual DSM |
| High Availability Manager | Reduce service downtime by setting up two identical NAS into one high-availability cluster |
| Snapshot Replication | <ul style="list-style-type: none">Maximum shared folder snapshots: 1,024Maximum replications: 32 |
| Active Directory Server | A flexible and cost-effective domain controller solution |
| VPN Server | Maximum connections: 20, supported VPN protocol: PPTP, OpenVPN™, L2TP/IPSec |
| MailPlus Server | Secure, reliable, and private mail solution with high-availability, load balancing, security and filtering design (Includes 5 free email account licenses; additional accounts require the purchasing of additional licenses) |

| | |
|---------------------|--|
| MailPlus | Intuitive webmail interface for MailPlus Server, customizable mail labels, filters, and user interface |
| Collaboration tools | <ul style="list-style-type: none"> • Chat maximum users: 1,500 • Office maximum users: 1,800 • Calendar: support CalDAV and access via mobile devices |
| Note Station | Rich-text note organization and versioning, encryption, sharing, media embedding and attachments |
| Storage Analyzer | Volume and quota usage, total size of files, volume usage and trends based on past usage, size of shared folders, largest/most/least frequently modified files |
| Antivirus Essential | Full system scan, scheduled scan, white list customization, virus definition auto update |
| Download Station | Supported download protocols: BT, HTTP, FTP, NZB, eMule, Thunder, FlashGet, QQDL Maximum concurrent download tasks: 80 |
| Web Station | Virtual host (up to 30 websites), PHP/MariaDB®, 3rd-party applications support |
| Other packages | Video Station, Photo Station, Audio Station, DNS Server, RADIUS Server, iTunes® Server, Log Center, additional 3rd-party packages are available in Package Center |

Environment and Packaging

| | |
|----------------------|--|
| Environment safety | RoHS compliant |
| Package content | <ul style="list-style-type: none"> • DS1618+ main unit x 1 • Quick Installation Guide x 1 • Accessory pack x 1 • AC power cord x 2 • RJ-45 LAN cable x 2 |
| Optional accessories | <ul style="list-style-type: none"> • 4GB DDR4-2133 Non-ECC SO-DIMM (D4NS2133-4G) • 16GB DDR4-2133 ECC SO-DIMM (RAMEC2133DDR4SO-16G) • Synology E10G17-F2 / E10G15-F1 10Gbps Ethernet adapters • Synology M2D17 M.2 SSD adapter card • Expansion Unit DX517 • VisualStation VS360HD, VS960HD • Surveillance Device License Pack • MailPlus License Pack • Virtual DSM License Pack |
| Warranty | 3 years |

*Model specifications are subject to change without notice. Please refer to www.synology.com for the latest information.

1. Performance figures may vary depending on environment, usage, and configuration.
2. DS1618+ supports dual M.2 SSD through M2D17 adapter card, sold separately.
3. DS1618+ supports up to two Synology DX517, sold separately.
4. 5 year warranty is available as an optional bundle with EW201, 2-year Extended Warranty service add-on. Visit https://www.synology.com/en-global/products/Extended_Warranty for more information on availability.
5. exFAT Access is purchased separately in Package Center.
6. System snapshot includes snapshots taken by iSCSI Manager, Snapshot Replication, and Virtual Machine Manager. Availability of these packages varies by model.

SYNOLOGY INC.

Synology is dedicated to taking full advantage of the latest technologies to bring businesses and home users reliable and affordable ways to centralize data storage, simplify data backup, share and sync files across different platforms, and access data on-the-go. Synology aims to deliver products with forward-thinking features and the best in class customer services.

Copyright © 2018, Synology Inc. All rights reserved. Synology, the Synology logo are trademarks or registered trademarks of Synology Inc. Other product and company names mentioned herein may be trademarks of their respective companies. Synology may make changes to specification and product descriptions at anytime, without notice.

DS1618+-2018-ENU-REV001

Headquarters

Synology Inc. 3F-3, No. 106, Chang An W. Rd., Taipei, Taiwan Tel: +886 2 2552 1814 Fax: +886 2 2552 1824

| | | | | |
|---|---|---|--|--|
| China Synology Shanghai 200070, Room 516, No. 638 Hengfeng Rd., Zhabei Dist. Shanghai, China | France Synology France SARL 39 rue Louis Blanc, 92400 Courbevoie, France Tel: +33 147 176288 | North & South America Synology America Corp. 3535 Factoria Blvd SE #200 Bellevue, WA 98006, USA Tel: +1 425 818 1587 | United Kingdom Synology UK Ltd. Unit 5 Danbury Court, Linford Wood, Milton Keynes, MK14 6PL, United Kingdom Tel: +44 (0)190 804 8029 | Germany Synology GmbH Grafenberger Allee 125 40237 Düsseldorf Deutschland Tel: +49 211 9666 9666 |
|---|---|---|--|--|